


Thyristor Surge Suppressor

Version: A0 2016-06-28

Features

- Excellent capability of absorbing transient surge
- Quick response to surge voltage (nS Level)
- Low Capacitance and high surge level  
( $C_o < 25\text{pF}, 6\text{KV}@10/700\mu\text{S}$ )
- Eliminates overvoltage caused by fast rising transients
- Moisture sensitivity level: Level 1
- Weight: 87mg
- Non degenerative

Exterior

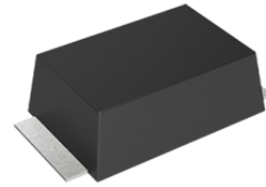

SMB-F

Application information

- Video
- TVI/CVI/AHD

Package (Top View)



Agency Approvals

Icon	Description
<b>RoHS</b>	Compliance with 2011/65/EU
<b>HF</b>	Compliance with IEC61249-2-21:2003

Schematic Symbol



Part Number and Electrical Parameter

Part Number	I <sub>DRM</sub> @V <sub>DRM</sub>		V <sub>S</sub> <sup>①</sup> @ I <sub>S</sub>		V <sub>T</sub> @ I <sub>T</sub>		I <sub>H</sub>	C <sub>o</sub> <sup>②</sup>
	μA	V	V	mA	V	A	mA	pF
	MAX		MAX		MAX		MIN	MAX
BS0060N-C-FS	5	6	25	800	4	2.2	15	25

Absolute maximum ratings measured at TA= 25°C RH = 45%-75% (unless otherwise noted).

① V<sub>S</sub> is measured at 100KV/S

② Off-state capacitance is measured at V<sub>DC</sub>=2V, V<sub>RMS</sub>=1V, f=1MHz

Thyristor Surge Suppressor

Part Numbering System

BS 0060 N C F S  
(1) (2) (3) (4) (5) (6)

- (1) Bencent Semiconductor Surge Arrester
- (2) Off-state Voltage, e.g.0060=6 × 10<sup>0</sup>=6V
- (3) Package : SMB-F,
- (4) 6KV(10/700μs)
- (5) Flat Feet
- (6) Low Capacitance<25pF


V-I Curve

Parameters	Definition
V <sub>DRM</sub>	Peak off-state voltage
I <sub>DRM</sub>	Off-state Current
V <sub>S</sub>	Switching Voltage
I <sub>S</sub>	Switching Current
I <sub>H</sub>	Holding Current
V <sub>T</sub>	On-state voltage
I <sub>T</sub>	On-state current
C <sub>O</sub>	Off-state capacitance

Mark



6NCS: Part Number  
1308 : August,2013

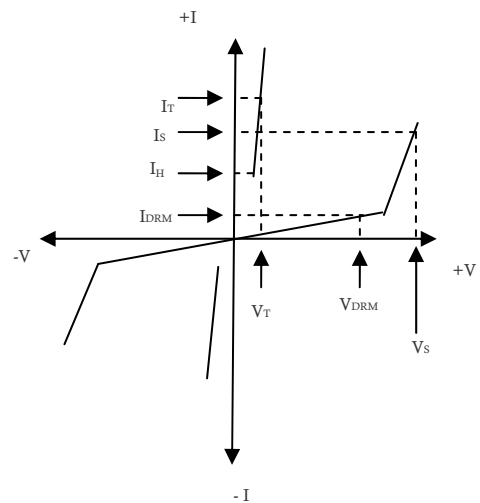

Surge Ratings

Current Waveform	5/320μs*
Voltage Waveform	10/700μs*
I <sub>pp</sub>	150A

- Peak pulse current rating(I<sub>pp</sub>)is repetitive and guaranteed for the life of the product;
- Bencent only makes the test for 5/320μs@150A\*(10/700μs@6KV) Bencent will not take any obligation for these parameters, so before applying our parts, please make sure to verify the parameters listed in the above table.



Thermal Considerations

Symbol	Parameter	Value	Unit
T <sub>J</sub>	Operating Junction Temperature Range	-40 to +150	°C
T <sub>S</sub>	Storage Temperature Range	-60 to +150	°C


Product Characteristics

Lead Material	Copper Alloy
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Terminal Finish	100% Matte-Tin Plated

## Typical Characteristics

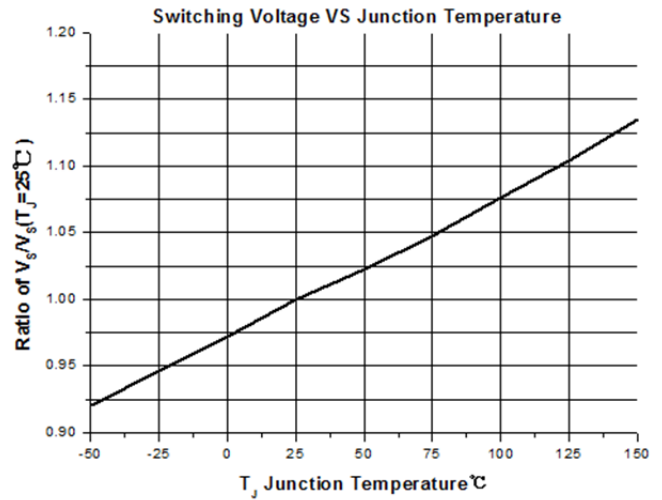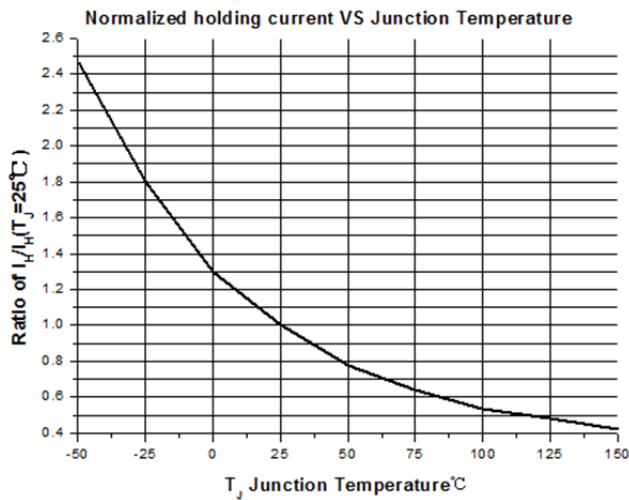


## Product Dimensions

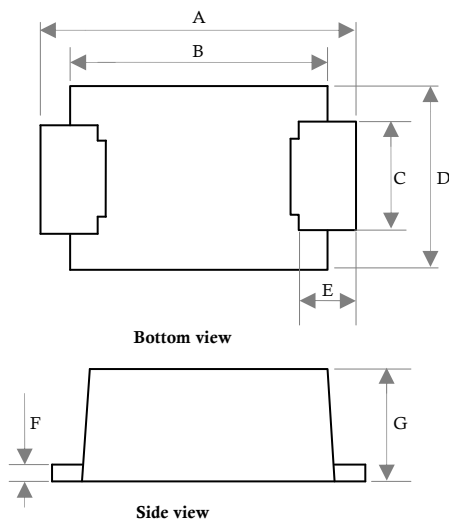

REF	mm	inch
A	5.4±0.3	0.213±0.012
B	4.4±0.2	0.173±0.008
C	2.0±0.1	0.079±0.004
D	3.3±0.3	0.130±0.012
E	0.8±0.3	0.032±0.012
F	0.25±0.05	0.010±0.002
G	2±0.3	0.079±0.012


## Recommended Soldering Pad

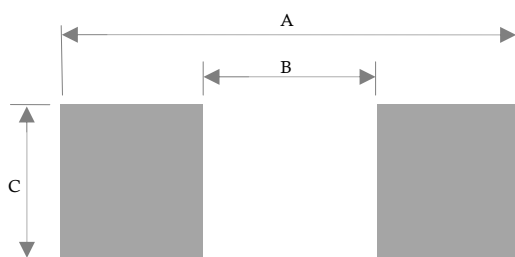


REF	mm	inch
A	6.4	0.252
B	3.4	0.134
C	2.75	0.108

Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) $T_{amp}$ ( $T_L$ ) to peak		3°C/second max
$T_S(\text{max})$ to $T_L$ - Ramp-up Rate		3°C/second max
Reflow	- Temperature ( $T_L$ ) (Liquid)	217°C
	- Temperature ( $T_L$ )	60 – 150 seconds
Peak Temperature ( $T_P$ )		260+0/-5 °C
Time within 5°C of actual peak Temperature ( $T_P$ )		25seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature ( $T_P$ )		8 minutes Max.
Do not exceed		260°C

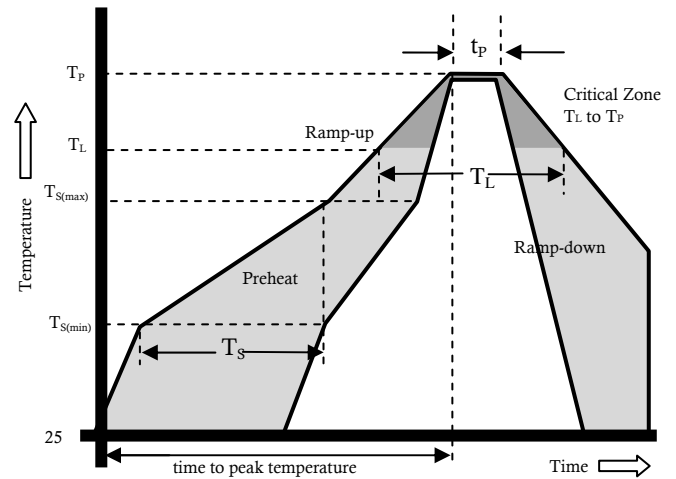

Package Reel Information

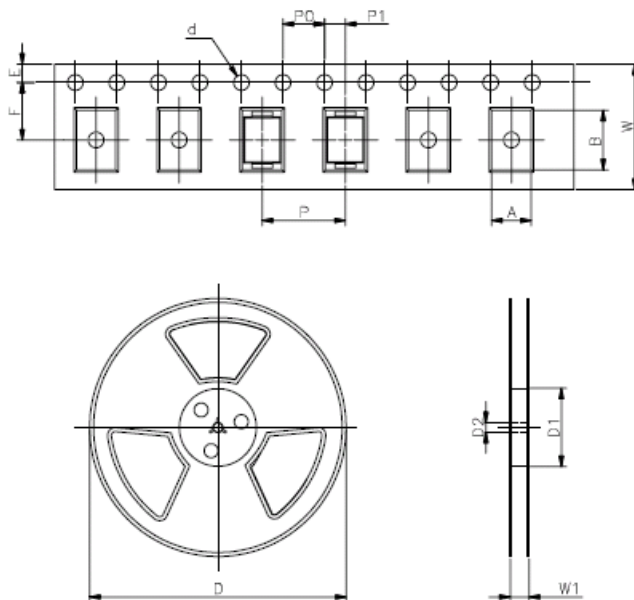

REF	mm	inch
A	3.65+/-0.3	0.144+/-0.012
B	5.69+/-0.3	0.244+/-0.012
d	1.5+/-0.1	0.059+/-0.004
D	330.0	13.0
D1	100+/-3	3.937+/-0.118
D2	13+/-0.3	0.512+/-0.012
E	1.5+/-0.2	0.059+/-0.008
F	5.65+/-0.2	0.222+/-0.008
P	8.0+/-0.2	0.315+/-0.008
P0	4.0+/-0.2	0.157+/-0.008
P1	2.0+/-0.2	0.079+/-0.008
W	12.0+/-0.2	0.472+/-0.008
W1	16.8+/-2.0	0.661+/-0.079

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	3,000	24,000	330	360	360	380